



DSH+C

DOUBLE SWIVEL HOOK + CENTRING
CROCHET A DOUBLE ARTICULATION + CENTRAGE
DOPPELWIRBELHAKEN + ZENTRIERUNG
GANCHO DOBLE GIRATORIO ARTICULADO + CENTRAJE



HIGH TENSILE ■ HAUTE RESISTANCE ■ HOCHFEST ■ ALTA RESISTENCIA

Class > 8

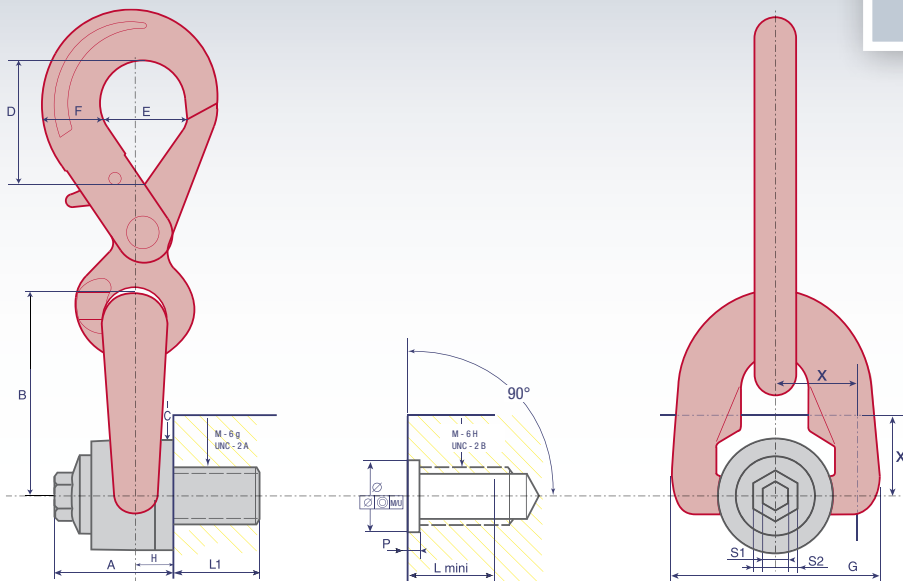

www.codipro.net

1,000 LBS = 0,4536 TO

| Reference Référence Referencia | WLL CMU Höchstbelastung CMU | Safety factor Coef. sécurité Sicherheitsfaktor Coef. seguridad | Diameter Diamètre Durchmesser Diámetro | Ø | P | standard L1 | N.m FootLBS | X | S1 | S2 | A | B | C | D | E | F | G | H | Weight Poids Gewicht Peso |
|--------------------------------------|--------------------------------------|---|---|----------------------------------|---------------------------------|----------------|------------------|----|-------|------|----|----|----|----|----|----|----|-----|------------------------------------|
| DSH+C M 8 | 0,3 TO | 5 | M8 (x1,25) | 16 ^{+0,25} ₀ | 3 ⁺¹ _{+0,5} | 14 | 6 | 18 | 8 | 16 | 33 | 56 | 30 | 44 | 32 | 23 | 58 | 9,5 | 0,8 Kg |
| DSH+C M 10 | 0,6 TO | 5 | M10 (x1,50) | 20 ^{+0,25} ₀ | 3 ⁺¹ _{+0,5} | 17 | 10 | 18 | 8 | 16 | 33 | 56 | 30 | 44 | 32 | 23 | 58 | 9,5 | 0,8 Kg |
| DSH+C M 12 | 1 TO | 5 | M12 (x1,75) | 20 ^{+0,25} ₀ | 3 ⁺¹ _{+0,5} | 21 | 15 | 18 | 8 | 16 | 33 | 56 | 30 | 44 | 32 | 23 | 58 | 9,5 | 0,8 Kg |
| DSH+C M 14 | 1,3 TO | 5 | M14 (x2) | 20 ^{+0,25} ₀ | 3 ⁺¹ _{+0,5} | 23 | 30 | 24 | 8 | 20 | 45 | 76 | 45 | 58 | 46 | 29 | 79 | 13 | 1,9 Kg |
| DSH+C M 16 | 1,6 TO | 5 | M16 (x2) | 20 ^{+0,25} ₀ | 3 ⁺¹ _{+0,5} | 27 | 50 | 24 | 8 | 20 | 45 | 76 | 45 | 58 | 46 | 29 | 79 | 13 | 2 Kg |
| DSH+C M 18 | 2 TO | 5 | M18 (x2,5) | 30 ^{+0,30} ₀ | 3 ⁺¹ _{+0,5} | 27 | 70 | 24 | 8 | 20 | 45 | 76 | 45 | 58 | 46 | 29 | 79 | 13 | 2 Kg |
| DSH+C M 20 | 2,5 TO | 5 | M20 (x2,5) | 30 ^{+0,30} ₀ | 3 ⁺¹ _{+0,5} | 30 | 100 | 24 | 8 | 20 | 45 | 76 | 45 | 58 | 46 | 29 | 79 | 13 | 2 Kg |
| DSH+C U 516 | 650 LBS | 5 | UNC 5/16"-18 | 20 ^{+0,25} ₀ | 3 ⁺¹ _{+0,5} | 15 | 7 _{FL} | 18 | 5/16" | 5/8" | 33 | 56 | 30 | 44 | 32 | 23 | 58 | 9,5 | 0,8 Kg |
| DSH+C U 038 | 1,200 LBS | 5 | UNC 3/8"-16 | 20 ^{+0,25} ₀ | 3 ⁺¹ _{+0,5} | 17 | 8 _{FL} | 18 | 5/16" | 5/8" | 33 | 56 | 30 | 44 | 32 | 23 | 58 | 9,5 | 0,8 Kg |
| DSH+C U 050 | 2,200 LBS | 5 | UNC 1/2"-13 | 20 ^{+0,25} ₀ | 3 ⁺¹ _{+0,5} | 21 | 12 _{FL} | 18 | 5/16" | 5/8" | 33 | 56 | 30 | 44 | 32 | 23 | 58 | 9,5 | 0,8 Kg |
| DSH+C U 058 | 3,800 LBS | 5 | UNC 5/8"-11 | 20 ^{+0,25} ₀ | 3 ⁺¹ _{+0,5} | 27 | 40 _{FL} | 24 | 5/16" | 20 | 45 | 76 | 45 | 58 | 46 | 29 | 79 | 13 | 1,9 Kg |
| DSH+C U 075 | 5,500 LBS | 5 | UNC 3/4"-10 | 30 ^{+0,30} ₀ | 3 ⁺¹ _{+0,5} | 30 | 80 _{FL} | 24 | 5/16" | 20 | 45 | 76 | 45 | 58 | 46 | 29 | 79 | 13 | 2 Kg |

Other variants of the fixing axis available upon request / Autres variantes de l'axe de fixation sur demande / Weitere Varianten der Verbindungsbolzen auf Anfrage / Otras variantes del eje de fijación bajo solicitud



www.codipro.net ■ info@codipro.net

Luxembourg : Zone d'Activités Salzbaach ■ L - 9559 WILTZ ■ BP 100 L - 9502 WILTZ ■ Tél. +352 26 81 54-1 ■ Fax +352 81 05 17

France : 9, Boulevard des Ravalières Z.A. ■ F - 72560 CHANGÉ ■ Tél. +33(0)2 43 40 17 00 ■ Fax +33(0)2 43 40 07 99