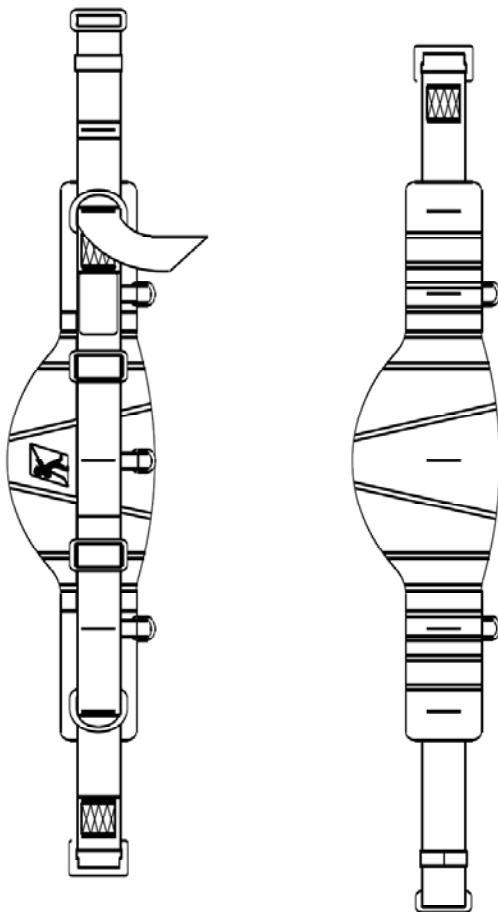


CE 01

- Two lateral hitch D rings.
- Three sizes S, M and XL


APPLICATIONS

Belt for work positioning.

This product is not designed for use as a fall arrest device !

DESCRIPTION and PRINCIPLE

Working belt incorporating side « D » for attaching a work positioning lanyard.

Adjustable with quick opening using a single set of buckles. Excess belt is held in position with elastic loops.

The back support is made of thermoformed foam.

The inside surface has a sponge type covering.

There are 3 buckles for attaching a tool bag.

This working belt may be combined with any harness of our range, using belt loops making a fully integrated belt-harness assembly.

FEATURES

Side anchoring : 2 stainless steel « D » rings.

Adjustable with quick opening.

2 sizes,

Lightweight,

Rot-proof.

MODELES

CE01 P : Small

CE01 M : Medium

CE01 G : Large

TECHNICAL DATA

	Size	Weight
CE01 P	44-46	0.420 Kg
CE01 M	48-50	0.450 Kg
CE01 G	52-54	0.480 Kg

Manufactured in accordance with

standard EN 358 of 05/93 CE type approval :

APAVE n° 0082/352/160/05/97/0087

Double thickness foam back support with closed cells blue exterior, black knitted material inside.

Buckles : stainless steel A1 S1 304 L
stamped 2017A, 25 CD4

PES belt, dried thread, width : 44 mm, black,
automatic stitching : PES thread 12/3 yellow.