


CH - CABLE CRIMPING TOOLS

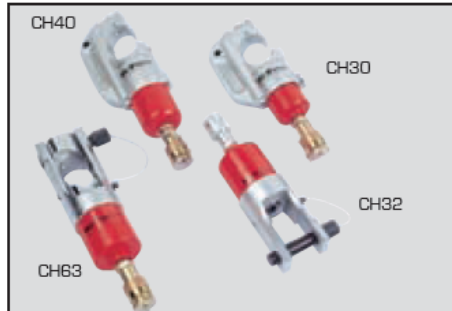

Choice of 7 available models

Supplied complete with die sets

Working pressure 700 Bar

The CH hydraulic cable crimping tool range offers 7 models with a choice of open “C” jaw or parallel guide design. All models are supplied complete with standard die sets and a carrying case. Models with 180° rotating head are designed for easy access into confined spaces. Pump units include HP227FPC foot operated pump set which includes elbow fitting, gauge, gauge block, 3 metre hose and male coupler, as shown below. All models, excluding HC1000, are available as a complete kit, comprising of HP227FPC, MB1 metal storage case and selected crimping tool with die sets.

- » Models CH30, CH40 & CH63 suitable for crimping connectors up to 630mm²
- » Models CH21 & CH32 are suitable for crimping non-insulated terminals up to 400mm²
- » Models CH80 & CH1000 are suitable for crimping distribution and transmission lines up to 1000mm²



Hi-Force foot operated manual pump unit complete with accessories. For pump specifications, please see page 23, model HP227FP.



Model number	Output tonnes	C-Jaw opening	Applicable range DIN mm ²	Standard dies mm ²	Length mm	Weight kg
CH21	10	not applicable	16-240	With die (4pcs) 16-25, 35-70, 70-185, 240 Female die(1pc) 25-35, 50-70, 95-120, 150-185, 240	210	3.0
CH30	12	30 mm	35-400	With die 35, 50, 70, 95, 120, 150, 185, 240, 300, 400	220	4.0
CH32	18	not applicable	16-400	With die (4pcs) 16, 25-35, 50-120, 150-400 Female die(8pcs) 16-25, 35-70, 95-120, 150, 185, 240, 300, 400	210	3.6
CH40	12	38 mm	35-400	With die 35, 50, 70, 95, 120, 150, 185, 240, 300, 400	245	4.8
CH63	18	not applicable	35-630	With die 35, 50, 70, 95, 120, 150, 185, 240, 300, 400, 500, 630	240	4.8
CH80	15	50 mm	35-630	With die 35, 50, 70, 95, 120, 150, 185, 240, 300, 400, 500, 630	300	7.0
CH1000	50	not applicable	500-1000	With die 500, 630, 800, 1000	420	38.0

Note : Models CH21 & CH32 supplied with single indent dies, all other models supplied with hexagon dies.