


FLEMISH EYE FERRULES


Available from Code	1/4" to 4 1/2"
---------------------	----------------

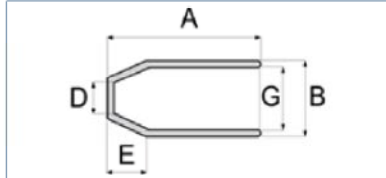

Ferrule No.	Single layer round strand ropes-Ø (till 1770 N/mm ² tensile grade)*		A		D		E		Swaging dies No.	Diameter of the swaged ferrule
	mm	Inch	A	B	D	E	G	mm		
6	6	1/4"	25.4	16.8	7.9	7.5	11.95		6	14.5
8	8	5/16"	38	23	9.65	10.5	15.75		8	19.0
9/10	9-10	3/8"	38.0	23.0	11.9	11.0	16.6		9/10	18.5
11	11	7/16"	51	31	14.3	15.7	21.4		11	25.5
12/13	12-13	1/2"	50.8	30.9	15.8	14.2	23.0		12/13	25.0
14	14	9/16"	61.1	34.1	17.4	15.8	25.4		14	28.0
16	16	5/8"	69.8	37.3	19.0	17.4	27.7		16	30.5
18/20	18-20	3/4"	81.3	43.6	23.0	21.4	32.8		18/20	35.8
22	22	7/8"	90.4	51.5	26.1	25.4	38.8		22	41.5
24/26	24-26	1"	101.6	57.9	29.3	28.5	43.6		24/26	47.8
28/29	28-29	1 1/8"	122.0	63.5	32.5	31.7	49.2		28/29	52.8
30/32	30-32	1 1/4"	132.0	70.6	36.5	35.7	54.7		30/32	57.7
34/36	34-36	1 3/8"	148.0	76.3	39.7	39.7	60.3		34/36	62.5
37/38	37-38	1 1/2"	159.0	82.6	42.8	42.8	66.6		37/38	67.3
44	44	1 3/4"	184.0	97.6	50.8	49.2	79.4		44	78.6
51	51	2"	216.0	111.2	58.8	57.0	92.1		51	90.3
56	56	2 1/4"	243.0	127.8	65.1	63.5	102.4		56	104.6
64	64	2 1/2"	267.0	139.7	76.2	70.0	114.3		64	114.4
68/70	70	2 3/4"	292.0	146.0	76.0	78.5	121.0		70	119.0
76	76	3"	305.0	152.4	82.6	76.0	127.0		76	126.0
87/89	88	3 1/2"	356.0	178.0	98.5	100.0	148.0		89	147.0
93/95	94	3 3/4"	381.0	191.0	103.0	108.0	160.0		95	158.0
100/102	102	4"	406.0	206.0	111.0	114.0	173.0		102	170.0
112/114	114	4 1/2"	457.0	232.0	124.0	129.0	195.0		114	189.0

* For accommodation of steel wire ropes with higher tensile grade than 1770N/mm² refer to our technical department.
We reserve the right to amend technical data