

Minifor® TR 10 - TR 30

A complete range of electric hoists for a wide range of applications, portable and powerful for unlimited heights of lift.

Minifor® TR 30S - TR 50

Have been designed to be compatible with the new techniques for high level building sites, to provide you with the best service:

These two versions give you:

- Unlimited length of hoist cable, adapted to the requirement.
- WLL 100 kg to 950 kg.
- Integral handle for easy carrying.
- Suitable for building sites, fast setup.
- Unloaded wire rope freely suspended or optional rope reeler.
- Pendant control or radio operation
- Direct lift or sheaving kit for increased capacity.
- Single phase or 3 phase motor.



Operational safety :


- Upper and lower limit switches.
- Motor integrated brake.
- Pendant / radio control with emergency stop.
- HP5 wire rope, dia. 6.5 mm.
- Spring cable reel, capacity 20 m and 40 m.
- 9m/min 3-phase version, 48 VAC control, 0.55 kW motor (TR30 only).
- Special motors.
- Long power supply and remote control cables.
- Pulley block kit.
- Self-locking hook.
- Radio remote control with «lift/lower» function.

minifor TR10 / TR30



Model	W.L.L. (kg)		Speed (m/min)		Dimensions (mm)											Ø wire rope (mm)	Motor	Weight (kg)	
	Direct	Sheaved	Direct	Sheaved	A	B	C	D	E	F	G	H	I	J	K				L
TR10	100	200	15	7.5	427	20	140	631	209	112	20	20	324	356	114	15	6.5	1 Phase 115v - 230v	20
TR30	300	600	5	2.5	427	20	140	631	209	112	20	20	324	356	114	15	6.5	1 Phase 115v - 230v	20

minifor TR30S / TR50

Model	W.L.L. (kg)		Speed (m/min)		Dimensions (mm)											Ø wire rope (mm)	Motor	Weight (kg)		
	Direct	Sheaved	Direct	Sheaved	A	B	C	D	E	F	G	H	I	J	K				L	M
TR30S	300	600	13	6.5	430	20	212	642	224	181	90	20	20	347	492	302	15	6.5	1 Phase 115v - 230v	31
TR50	500	950	7	3.5	430	20	212	642	224	181	90	20	20	347	492	302	15	6.5	1 Phase 115v - 230v	31

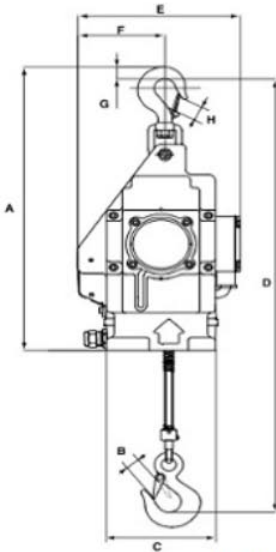

Minifor TR10 - TR30

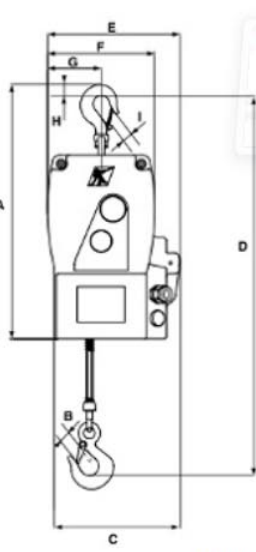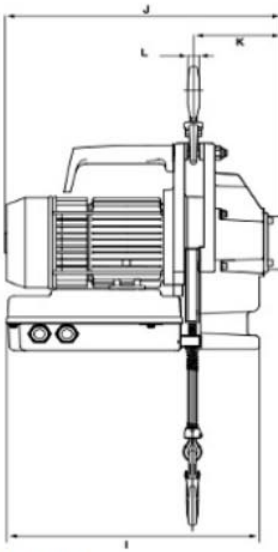

Minifor TR30S - TR50

