


Chain GrabiQ Grade 10

Short link, KL

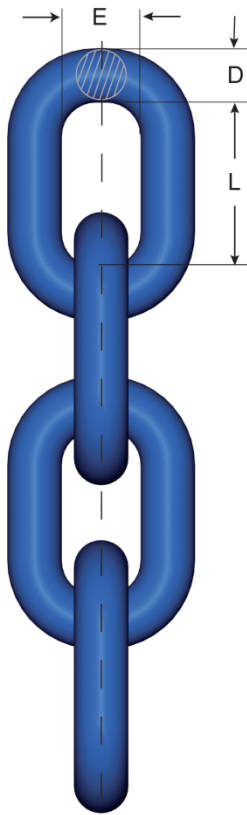

Heat treatment

Quenched and tempered.

Note! For chain grade 10 the maximum in service temperature is 200°C.

Surface treatment

Painted blue

Marking

10G

Art. no. Box	Code	D nom. mm	L » mm	E » mm	Weight kgs/m	WLL tonnes	MPF kN	Breaking force kN
Z801909 - 2x200 m	KLA 6-10	6	18	8	0.8	1.5	37	60
Z801915 - 3x100 m	KLA 8-10	8	24	11	1.4	2.5	62.5	100
Z801921 - 2x100 m	KLA 10-10	10	30	14	2.3	4	100	160
Z801927 - 1x125 m	KLA 13-10	13	39	18	3.8	6.7	162	260
Z801930 - 1x 92 m	KLA 16-10	16	48	22	5.6	10	250	402
Z802071 - 1 x 30.5 m	KLA 20-10	20	60	29	9.4	16	393	630