


Shank safety hook BKT

EN 1677-3

Grade 10

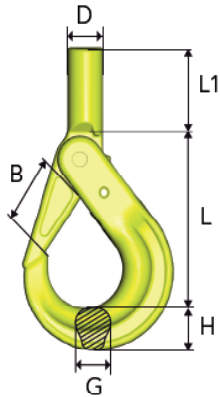

Code	WLL tonnes*	L	B	L1	D	dmin	G	H	Weight appr. kgs
BKT-6-10	1.5	90	29	36	20	11	15	21	0.5
BKT-7/8-10	2.5	111	37	47	24	13	17	26	0.9
BKT-10-10	4	133	45	51	29	16	21	31	1.6

d min = the smallest permitted shank dimension after machining.
 Note! After machining of the shank, proof loading must be carried out.