

NS & HMNS - NUT SPLITTERS





Capacities from 10 to 75mm AF

Working pressure 700 Bar

Compact & easy to use

The NS & HMNS range of hydraulic nut splitters offers a choice of 10 models suitable for hexagon nut AF sizes from 10 to 75mm (M6 to M48 bolt sizes). Designed to easily split corroded nuts up to Rc44 hardness, Hi-Force nut splitters offer the ideal "cold cut" solution for removing worn and corroded fasteners, especially in applications where "hot work" permits are not allowed. All NS models are supplied fitted with a unique 360° positional swivel coupling for easy adjustment and fitment in confined spaces. Suitable pumps for the NS models are detailed on pages 21 to 32. The HMNS models incorporate an integral hydraulic pump with multi-positional lever for even greater versatility. All models have an angled body design to provide the necessary clearance on flanges and flat surfaces, and the splitter blades are manufactured from high quality tool steel which must be re-sharpened or replaced, as and when required.

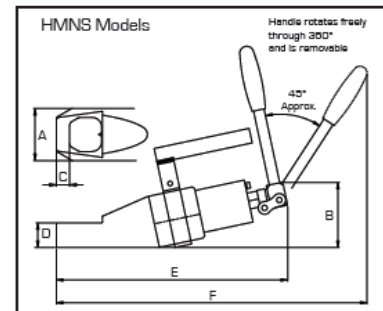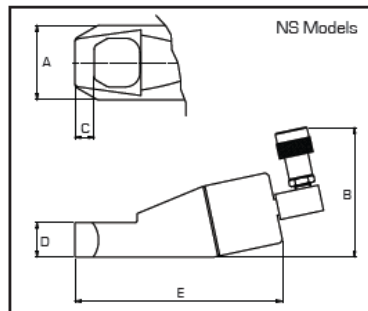

NS hydraulic nut splitters

Model number	Hexagon AF sizes mm	Thread sizes mm	Weight kg
NS75	10 - 19	M6 - M12	1.5
NS95	19 - 24	M12 - M16	2.3
NS126	24 - 32	M16 - M22	4.0
NS161	32 - 41	M22 - M27	6.5
NS197	41 - 50	M27 - M33	10.6
NS236	50 - 60	M33 - M39	14.6
NS296	60 - 75	M39 - M48	33.5

Dimensions in mm					
A	B	C	D	E	F
40	113	7.5	19.5	121	30
54	119	10.0	24.0	150	41
64	128	12.5	30.0	188	52
78	136	20.0	37.0	217	69
94	145	21.0	45.0	271	78
105	155	24.5	54.0	313	91
156	177	27.0	75.0	356	110

HMNS hydraulic nut splitters with integral manually operated pump

Model number	Hexagon AF sizes mm	Thread sizes mm	Weight kg
HMNS126	24 - 32	M16 - M22	5.5
HMNS161	32 - 41	M22 - M27	7.0
HMNS197	41 - 50	M27 - M33	13.4

Dimensions in mm					
A	B	C	D	E	F
64	93	12.5	30.0	328	447
78	103	20.0	37.0	357	465
94	120	21.0	45.0	410	540